


Install Instructions

Quick Guide

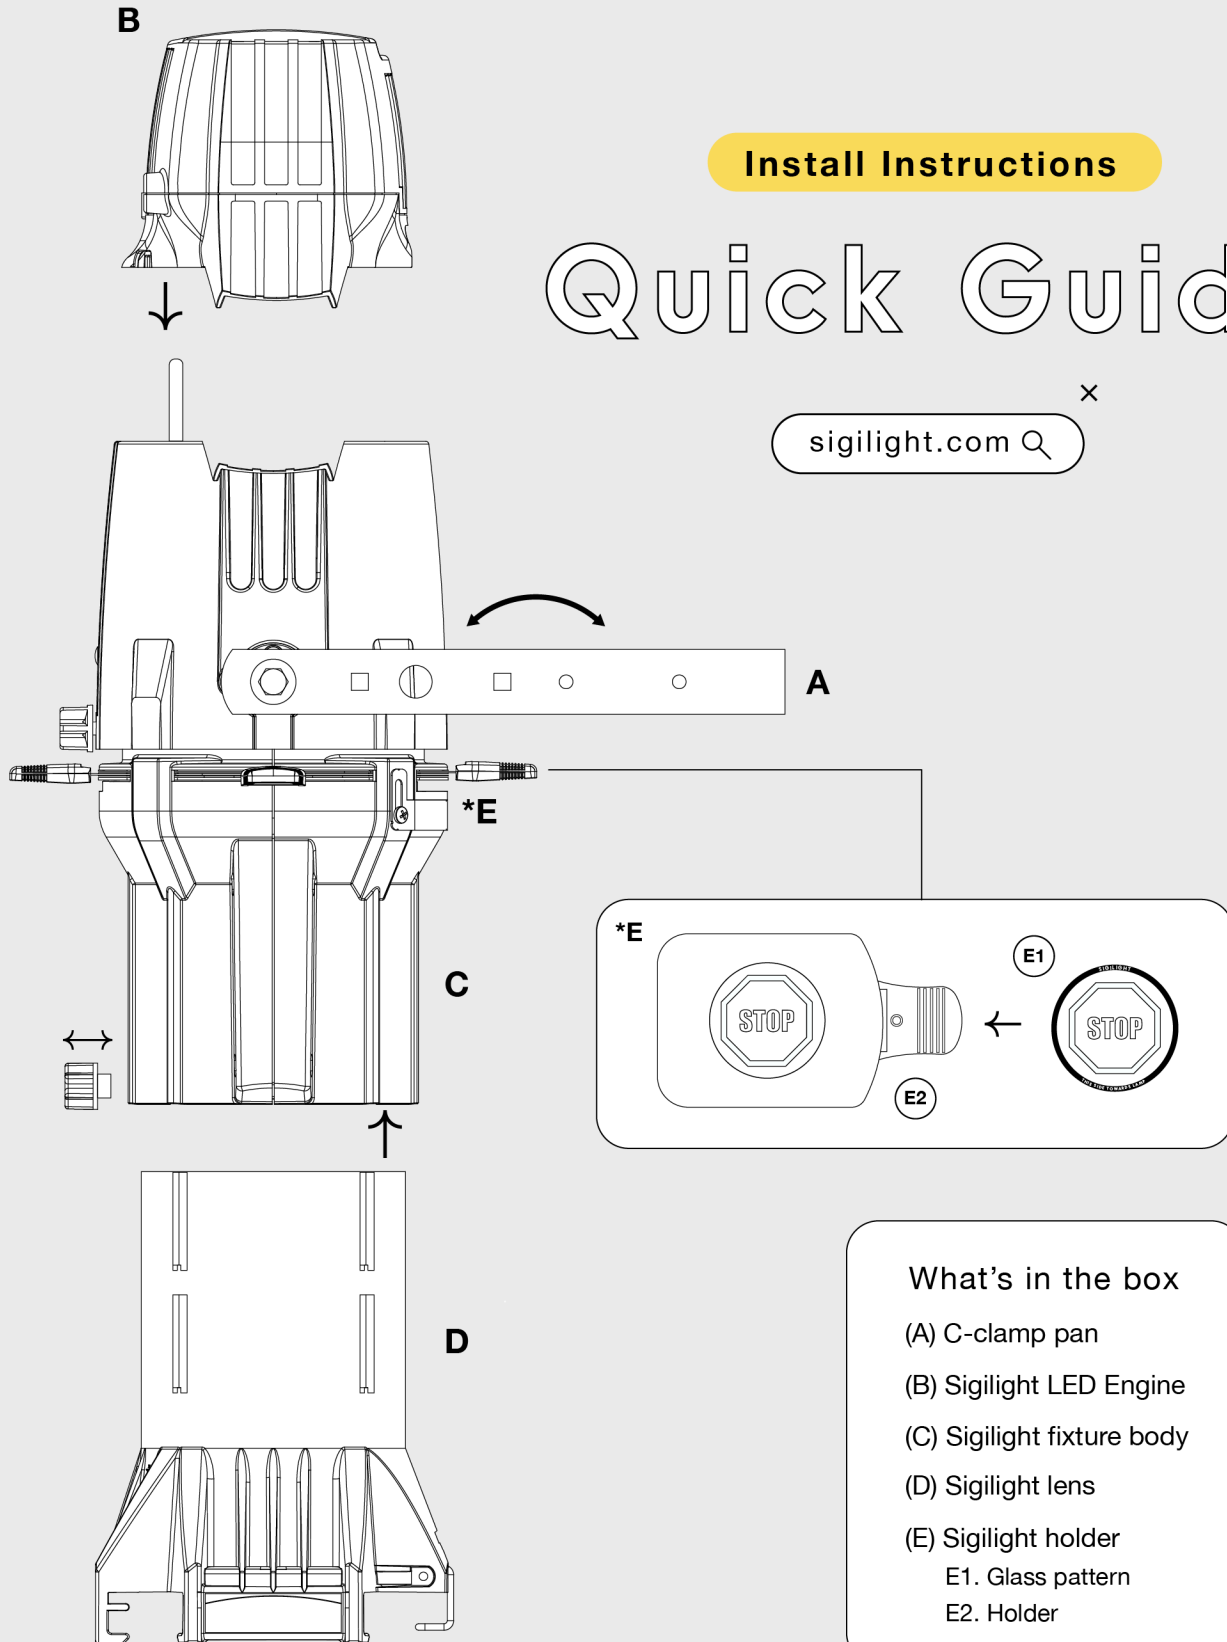

What's in the box

- (A) C-clamp pan
- (B) Sigilight LED Engine
- (C) Sigilight fixture body
- (D) Sigilight lens
- (E) Sigilight holder
 - E1. Glass pattern
 - E2. Holder



Install Instructions

Quick Guide

- * **STEP 1** Loosen the c-clamp pan screw (A) on the side of the Sigilight fixture body (C) and rotate the yoke 90 degrees.
- * **STEP 2** Attach the supplied threaded post to the top of the Sigilight fixture body (C).
- * **STEP 3** Slide the Sigilight LED Engine (B) onto the Sigilight fixture body (C) threaded post and use a #2 Phillips screwdriver to tighten.
- * **STEP 4** Rotate the yoke back 90 degrees to its vertical position and tighten pan screw.
- * **STEP 5** Remove the knob from the side of the Sigilight lens.
- * **STEP 6** Slide the Sigilight lens (D) under the Sigilight fixture body (C) and reinsert/readjust the knob through the side slot.
- * **STEP 7** Insert the Sigilight glass sign (E1) into the glass holder (E2) with the legend "THIS SIDE TOWARDS LAMP" facing upwards, and slide the glass holder into the side of the Sigilight fixture body (C).
- * **STEP 8** Move the Sigilight lens up or down as needed in order to focus the image on the floor.

We recommend read the entire manual before installing this equipment.

For any inquiries you can contact us at: support@geedop.us